



Series ASV300-XXX

PNEUMATIC ANGLE SEAT VALVE



SPECIFICATION



- Stainless Steel Angle Seat Valve, Normally Closed / Double Acting
- Aesthetically compact and modern design
- Ambient temperature -10 to +60 °C
- Working Pressure :3/8 ~ 2" 16 bar
:2-1/2 10 bar
- Installation :Any Position
- Viscosity :Max. 600 mm²/S

APPLICATIONS

- :Suitable for Beer, Water, Oil, Gas, Air, Steam etc.
- :Working Temperature -10 up to 180° C

MATERIAL LIST

1	Valve Body	CF8
2	Actuator	CF8
3	Seat	RPTFE
4	Stem Seals	PTFE/FKM
5	Piston Seals	FKM

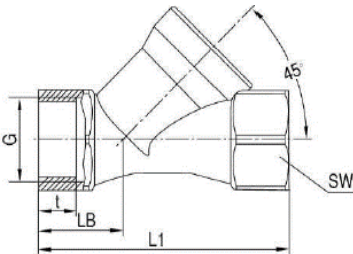

SIZE(G)	DN	G1	H/LA	D	L1	LB	T	SW	Actuator	Orifice	Kv (m ³ /h)
3/8	10	G1/8	110	3/8"	65	25.5	10	22	40	13	4.7
1/2	15	G1/8	121	1/2"	68	25.5	11.5	25	50	13	4.7
3/4	20	G1/8	125	3/4"	75	29	14	31	50	18	9.5
1	25	G1/4	153	1"	90	33.5	15	39	63	24	18.1
1-1/4	32	G1/4	161	1-1/4"	115	36	18	50	63	31	23.1
1-1/2	40	G1/4	185	1-1/2"	115	41	18	56	80	35	32.9
2	50	G1/4	195	2"	135	46	22	68	80	45	52.8
2-1/2	65	G1/4	237	2-1/2"	185	61	25	85	100	65	82



GPRO Valve Sdn Bhd

7, Lot 752 Jalan Subang 3, Taman Perindustrian

SG, Penaga 47610 Subang Jaya, Selangor, MALAYSIA

Tel: +6 03 8023 6900

Email: info@gprovalve.com.my