



Series GNV1-XXX

NEEDLE VALVE TYPE

SPECIFICATION

- DESIGN STANDARD :ASMEB16.34
- THREADED ENDS :NPT
- PRODUCT STYLE :J11F 800WOG~6000WOG
- WORKING PRESSURE :6000PSI
- TEMPERATURE RANGE :-20 °C~180 °C
- MATERIAL :SS316
- TEST&INSPECTION :API598


APPLICATIONS

- precise flow regulation in low-viscosity fluids across various sectors, including hydraulics, pneumatics, instrumentation, chemical processing, and laboratories

MATERIAL LIST

1	Body	CF8
2	Bonnet	CF8
3	Lock Nut	SS304
4	Stem	SS304
5	Handle	SS304
6	Packing	PTFE
7	Packing Gland	SS304
8	DISC	SS304

PRESSURE— TEMPERATURE RATING

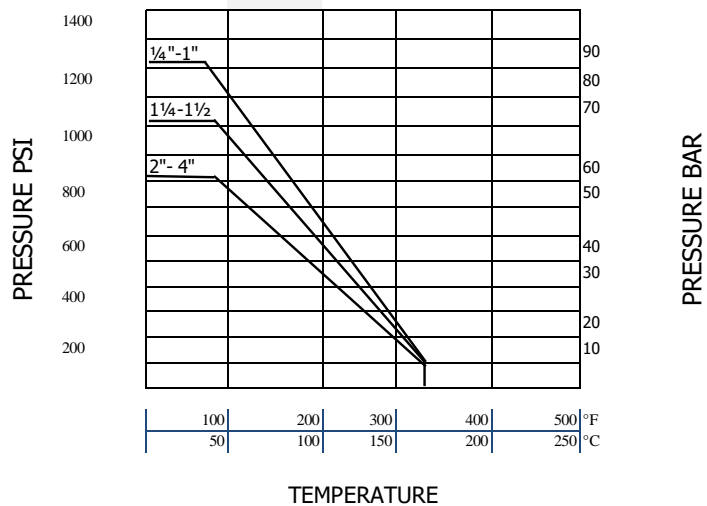

DN	L 1.5	H	T	KG
8	52	80	60	0.27
10	52	80	60	0.29
15	56	80	60	0.37
20	62	80	60	0.67
25	72	102	70	0.945



GPRO Valve Sdn Bhd
 7, Lot 752 Jalan Subang 3, Taman Perindustrian
 SG, Penaga 47610 Subang Jaya, Selangor, MALAYSIA

Tel: +6 03 8023 6900
 Email: info@gprovalve.com.my