



Series HLP 000

Pressure Switch





Specification

- For use with fluorinated refrigerants as well as with air and liquid
- Allowable Fluid Temp.: -10°C ~+120°C
- Mounting bracket supplied as standard
- Type HLP for universal application, G1/4 female thread
- Novel micro-switch ensures reliable switching
- With SPDT contact mechanism, IP40

ELECTRICAL FUNCTION

Rated Voltage(V)		Power Factor (cos φ)	125/250V. AC
Rated Amps.(A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	12
	Locked Rotor	0.45	72

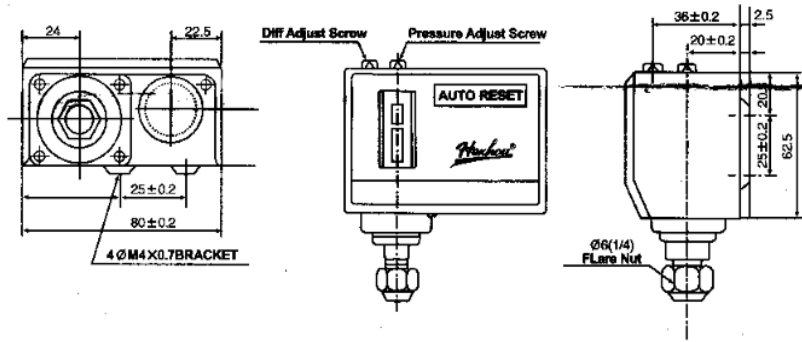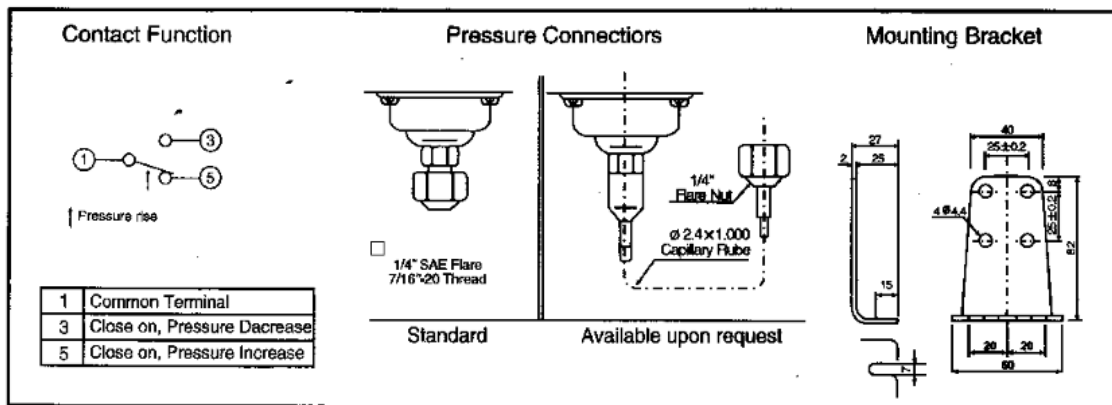

Part Number	Pressure Range	Switching pressure difference (bar)		Factory setting (bar)		Maximum bellows pressure (bar)
	(bar)	Min.	Max.	On	Off	
HLP 110	1 to 10	1	3	5	6	16.5
HLP 503	-0.7 to 3	0.2	1.5	1	2	16.5
HLP 506	-0.7 to 6	0.6	4	2	3	16.5
HLP516	5 to 16	1	4	8	10	35
HLP 530G	5 to 30	5	10	15	20	35



GPRO Valve Sdn Bhd
 7, Lot 752 Jalan Subang 3, Taman Perindustrian
 Sg. Penaga 47610 Subang Jaya, Selangor, Malaysia.

Tel: +6 03 8023 6900
 Whatsapp: +6 017 717 6900
 Email: info@gprovalve.com.my
 website: www.gprovalve.com.my