



Series GPVC-YSS000


GPVC Y Sediment Strainer

- Size : 1/2" ~ 4"
- Joint End : Socket (ANSI / DIN / JIS / CNS)
Threaded (PT/NPT/BSPF)
- Working Pressure : 150PSI



MATERIAL LIST

NO.	PART NAME	MATERIAL
1	Socket	UPVC
2	Nut	UPVC
3/6/7	O-Ring	EPDM
4	Body	PVC
5	Percolator	PP
8	Cock	UPVC

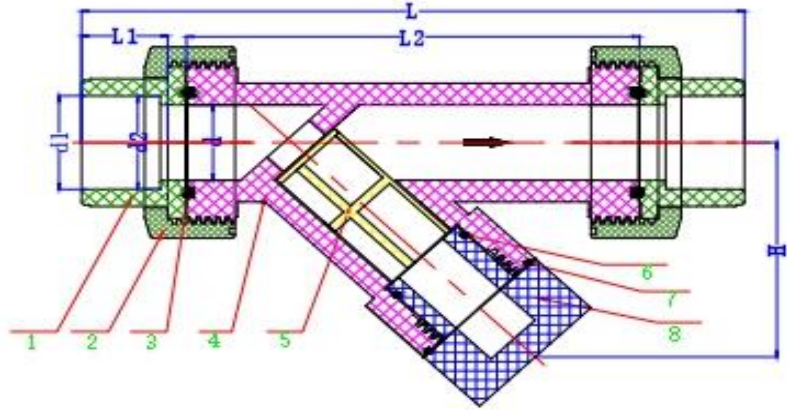

Size	d	d1					d2					L	L1	L2	H
		UPVC / CPVC				PPH	UPVC / CPVC				PPH				
		ANSI	DIN	JIS	CNS	DIN	ANSI	DIN	JIS	CNS	DIN				
1/2" (15)	15	21.40	20.25	22.30	22.40	19.30	21.25	20.05	21.85	21.90	19.00	174.00	22.30	110.00	55.00
3/4" (20)	20	26.75	25.25	26.30	26.40	24.10	26.58	25.05	25.85	25.90	23.80	195.00	26.00	125.00	66.00
1" (25)	25	33.52	32.25	32.33	34.50	31.00	33.28	32.05	31.85	33.90	30.70	202.00	29.00	138.00	75.00
1-1/4" (32)	32	42.28	40.25	38.43	42.50	39.00	42.05	40.05	37.85	41.90	38.60	233.00	32.50	149.00	82.00
1-1/2" (40)	40	48.40	50.25	48.46	48.60	49.00	48.12	50.05	47.75	47.90	48.60	276.00	35.50	189.00	105.00
2" (50)	50	60.45	63.25	60.56	60.60	61.90	60.18	63.05	59.75	59.90	61.40	311.00	38.50	222.00	135.00
2-1/2" (65)	63	73.30	75.25	76.60	76.70	73.60	72.85	75.85	75.05	75.87	75.90	410.00	64.50	268.00	168.00
3" (80)	75	89.25	90.35	89.60	89.70	88.30	88.70	88.70	90.05	88.83	88.90	485.00	70.00	330.00	220.00
4" (100)	90	114.60	110.35	114.70	115.00	108.00	114.10	110.05	110.05	113.98	113.80	615.00	84.00	420.00	300.00

